





POLYGON
TAPER
C6



C6 type shown


HSK-T




TAPER SHANK	CODE No.	d	D1	D2	I1	I2	I3	H1	M	Fig.	WEIGHT (kg)
C6	C6-SLT8 -70	8	25	40.9	70	48	32.7	46	M6 P=1	7	0.9
	C6-SLT10 -70	10	29	42			35.1	47	M8 P=1		1.0
	C6-SLT12 -80	12	34	47	80	58	45.1	58			1.1
	C6-SLT16 -90	16	40	46.4	90	68	59.7	70	M10 P=1.25		1.3
	C6-SLT20 -90	20	50	-			100	78			-
	C6-SLT25-100	25	55		75	M12 P=1.5			1.7		
	C6-SLT32-110	32	64		83				2.4		
	C6-SLT40-130	40	80	70	130	108	97	98	M16 P=1.5		3.8
HSK63T	HSK63T-SLT8 -75	8	25	42	75	49	32.7	37	M6 P=1	8	1.0
	HSK63T-SLT10 -80	10	29		80	54	41.1	45	M8 P=1		1.2
	HSK63T-SLT12 -85	12	34	47.8	85	59	45.5	50			M10 P=1.25
	HSK63T-SLT16-100	16	40	54.7	100	74	59.7	65	M12 P=1.5		
	HSK63T-SLT20-100	20	50	-			105				79
	HSK63T-SLT25-105	25	55		1.8						
	HSK63T-SLT32-115	32	64		62	115		89	83		
	HSK63T-SLT40-135	40	80	135		109	103	96	M16 P=1.5		3.9

Switching Coolant Way

■ Side thru with adaptive nozzle

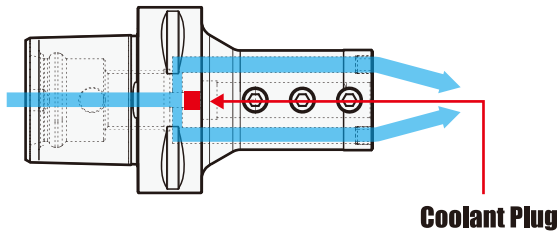

■ Center-thru

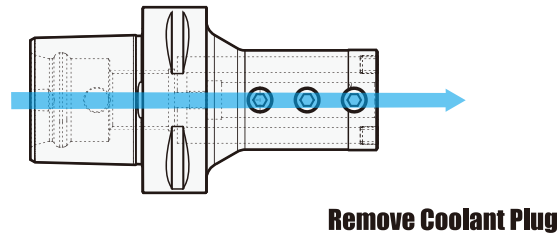

High Pressure Coolant-thru supported
(7 MPa)

- Thanks to special sealing system, high pressure coolant-thru up to 7 MPa is supported.
- Good solution for deep hole non-step drilling.

NIKKEN TURNING TOOL FOR MULTI-TASKING MACHINE

NEW SQUARE TOOL HOLDER & SIDE LOCK HOLDER



HIGH ACCURACY, RIGIDITY NIKKEN MILL, TURN TOOLING SYSTEM

